




CYCLOPS I _ SUPER BRIGHT 2 WAY LED LIGHT



- Super Bright light source
- Easy to handle & install
- Low light temperature
- Light weight

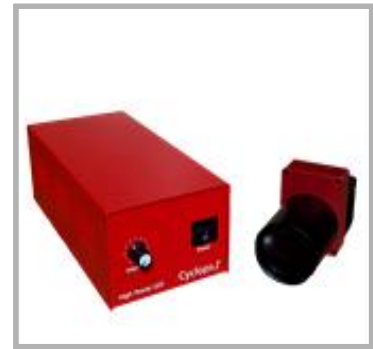

ILLUMINATION AREA & LUX

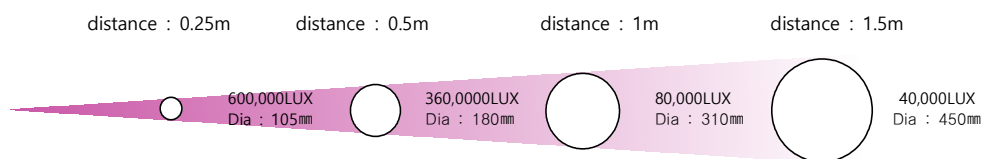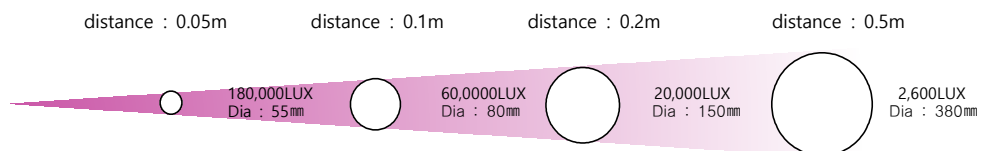

Type	Fiber (500mm)				Spot			
Distance(m)	0.05	0.1	0.2	0.5	0.25	0.5	1.0	1.5
Dia(mm)	55	80	150	380	105	180	310	450
Lux	180K	60K	20K	2.6K	600K	360K	80K	40K


ver20220211-1

Components

LED LIGHT HEAD(HEAD-W)



POWER SUPPLY(POW-120W)

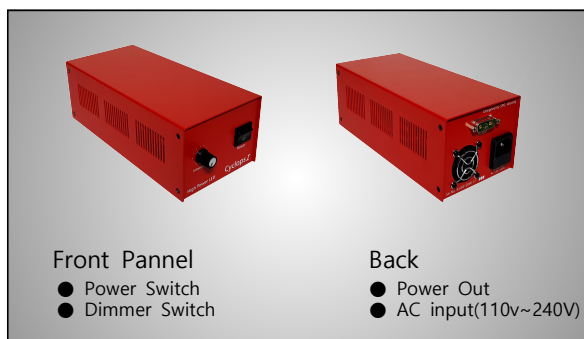

FLEXIBLE & RIGID FIBER OPTIC (Option) (Flex-1500-8-10, Rig-500-8-15, F-Adp)



MAGIC ARM(ARM-200PM) Option




SPECIFICATIONS

Features	Specification		ITEM	Specification
Power consumption	120W		Fiber Optic	Rigid (Rig-500-8-15)
Rated voltage	220V			Flexible (Flex-1500-8-10)
Power Output	Voltage : 6VDC			Fiber-Coupler
	Current : 20AMPS			
Frequency	50/60Hz			
Color temperature	6500K		Focusing Lens	150mm Focusing Lens (Foc-150-Sma)
Weight(kg)	Head	Power Supply	Magic arm	Arm-200PL
	0.1	1.6		
Dimension(mm)	Head	Power Supply		
	135x55x75	220x105x90		
Mean Life	50,000hours			
LED color	White (Standard)			
	Green or Red (Optional)			


ver20220211-2

CYCLOPS I 도면

Controller appearance drawing

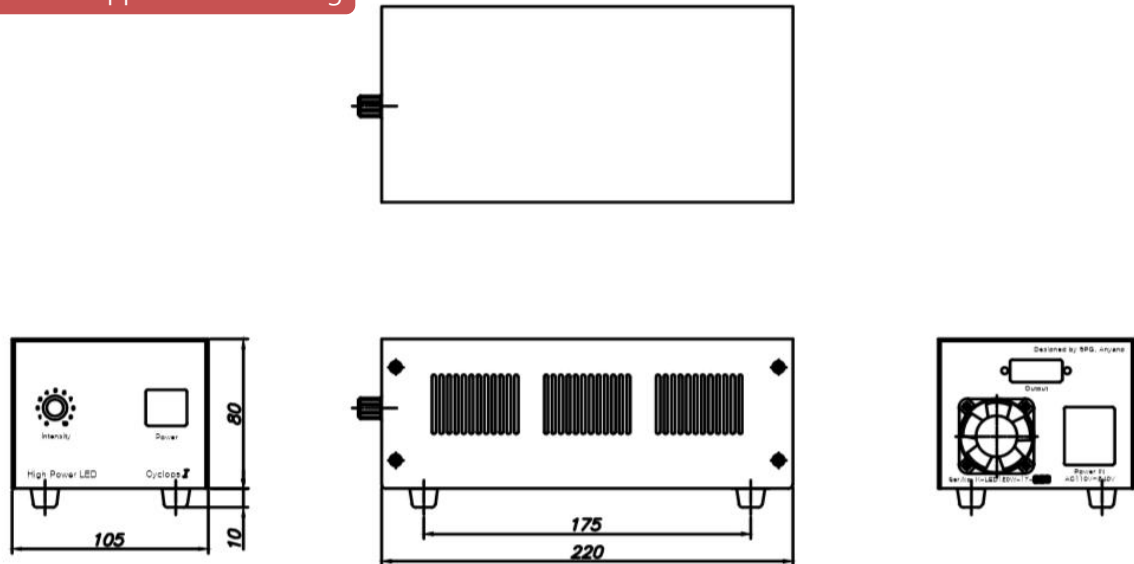

concentrated lens drawing

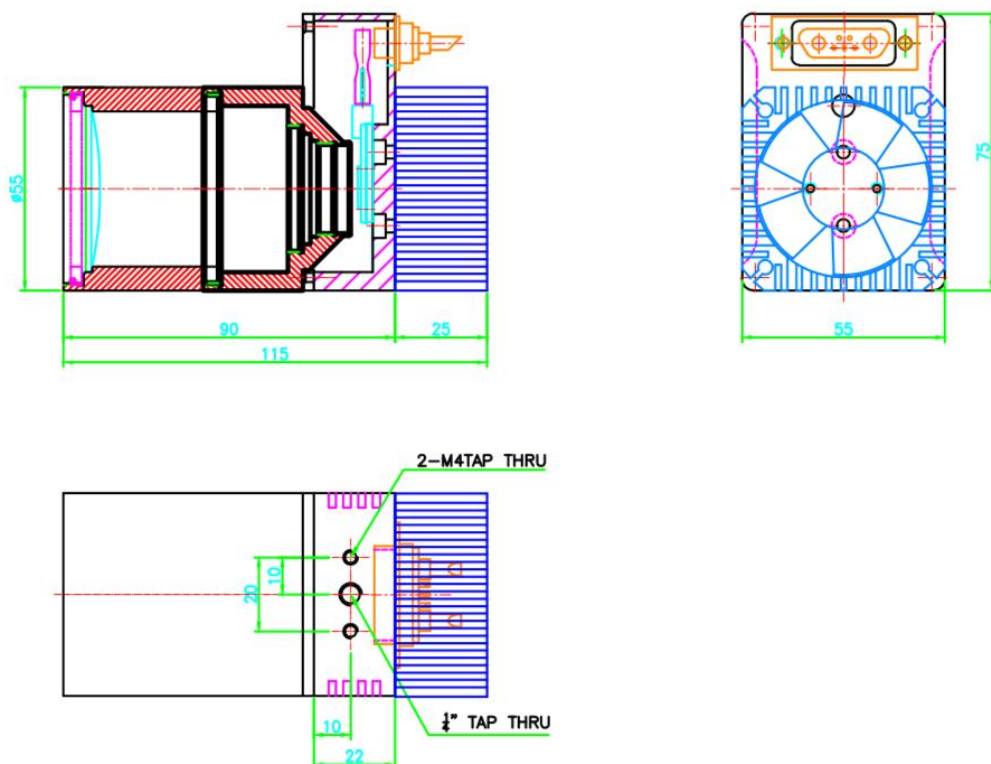

ver20220211-3